

A close-up photograph showing a person's hand using a white putty knife to apply a greyish wood filler into a hole in a light-colored wooden surface. The background is slightly blurred, showing vertical wooden planks.

**Timber.dot<sup>TM</sup>**  
***Wood Filler***

# **Product Catalogue**

*For more information visit our website  
[www.everminechemicals.com](http://www.everminechemicals.com)  
or contact us at +91 9999667646*

# Timber.dot<sup>TM</sup>

5-in-1 Water Based Wood Filler  
Grain & Joint Filler | Edge Filler | Hole & Knot Filler

## Timber.dot<sup>TM</sup> in a nutshell

**Timber.dot<sup>TM</sup>** is a water based interior Wood Grain & Joint Filler, Hole & Knot Filler and Edge Filler. It's quality is contrasted by the premium ingredients blended together in our formulation. Since **Timber.dot<sup>TM</sup>** does not shrink or crack, it has an indefinite Shelf Life if stored correctly.

Our formulation contains no harmful ingredients and is non-flammable, non-toxic yellowing, and is latex and acrylic free. Its multi-surface application can also be used on exterior surfaces if coated with **Sea Power<sup>TM</sup>** sealers or top coats.



## Timber.dot<sup>TM</sup> shades

Shades shown as a guide only.



**CEDAR**



**PINE**



**WALNUT**



**JARRAH**



**BLACK**



**WHITE**



**TEAK**



**MANGO**



**SHEESHAM**




**NON FLAMMABLE**



**NO EXPIRY**



**NO VOLATILE ORGANIC COMPOUNDS**

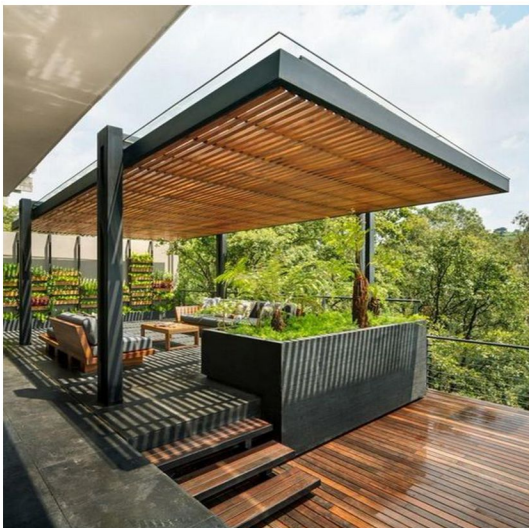

## COMPOSITION

**Timber.dot**™ is a water based, non toxic, latex and acrylic free wood grain filler. It can be mixed with any Stain Coatings & colourants (Water, Oil and Spirit based) Wood Stains can be applied before or after application.

## APPLICATION

**Timber.dot**™ is designed for indoor use, but can be applied on outdoor surfaces only if treated with suitable sealants or top coats after. We suggest mixing **Timber.dot** with water until desired consistency is achieved. Use a Filler knife or apply by hand on the cracks, chips or joints then let it cure. Our suggested drying time is 30-45 mins based on the depth of the fill, then follow up by sanding the surface smooth of any imperfections. Repeat these steps if necessary.

## COLOURS


**Timber.dot**™ comes in 9 shades, *Cedar, Sheesham, Jarrah, Pine, Teak, Walnut, White, Black & Mango*. We manufacture several colours to match almost every grain/shade. If you are using a clear coat, make sure you match the putty colour. If staining, use White or Pine.

## COVERAGE

**Timber.dot**™ can be mixed with water. Since the consistency varies on the amount of water used, we recommend:


<u>Mix</u>	<u>Covergae</u>
1 KG & 750 ML water	9-10 sq.m. per KG
1 KG & 500 ML water	8-9 sq.m. per KG
1 KG & 250 ML water	7-8 sq.m. per KG

# APPLICATION GUIDE




## 1. MIX

Mix desired stain (Colour) or water with **Timber.dot™** prior to application.




## 2. APPLY

Apply **Timber.dot™** with a Filler Knife or by hand to fill the cracks or joints.




## 3. DRY

Let **Timber.dot™** cure or use a heat gun to speed dry the surface. Normal cure time is 30-45 mins.




## 4. SAND

Sand **Timber.dot™** with 150-180 grit sand paper, or according to your need.



## 5. STAIN IF NECESSARY

Stain the surface with a choice of your stain if necessary. Sand with 400-600 grit sand paper before applying Top Coat.



## 6. TOP COAT

Apply any sanding sealer or lacquer based top coat for protection and shine according to Gloss/Matte level desired.

**PROCESSED & MANUFACTURED BY**

  
**EMC®**

**EVERMINE CHEMICALS**

**Mundka, New Delhi, 110041**  
**+91 9999667646 +91 9650782525**  
**everminechemicals@gmail.com**  
**www.everminechemicals.com**